



Standard Features


- ◆ Corner rings are webbed stainless steel external rings with leather chafe patches or doubled webbing straps
- ◆ All seams will have 2 to 3 rows of 3-step stitching, depending on size.
- ◆ Patches Fan/Radial type with buffers along foot and leech.
- ◆ Yachts over 30 feet (9.14mt) will have a two-ply head and clew area of which will be approximately 22% of the leech length.
- ◆ Sails include draft stripe
- ◆ Polyester or Spectra leech & foot lines.
- ◆ Tell-tails and one tell tail window.
- ◆ Heavy Duty sailbag.



2 or 3 rows of contrasting 3-step stitching and internal leechline chafe guard

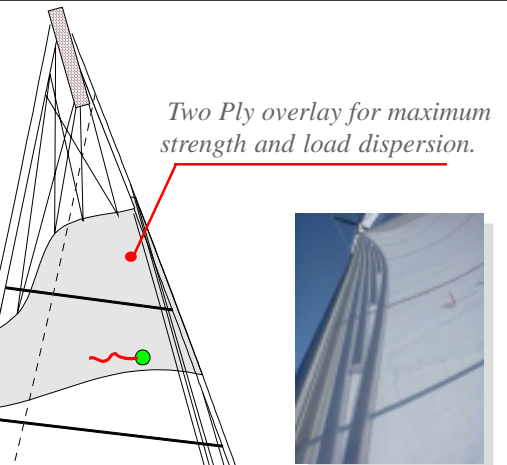

Two Ply overlay for maximum strength and load dispersion.

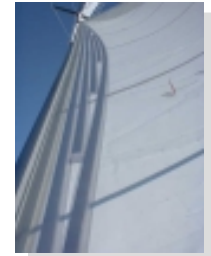


The unique Neil Pryde Multi Track Foam System avoids memory problems.

Optional Features

- ◆ [Neil Pryde Multi Track Foam luff system](#)
- ◆ Seamkote
- ◆ [Tradewinds Specifications](#)
- ◆ Sail Numbers
- ◆ U.V. sacrificial cover: Sunbrella Acrilon or light weight u.v. polyester.



Strapped-in rings for ultimate durability.

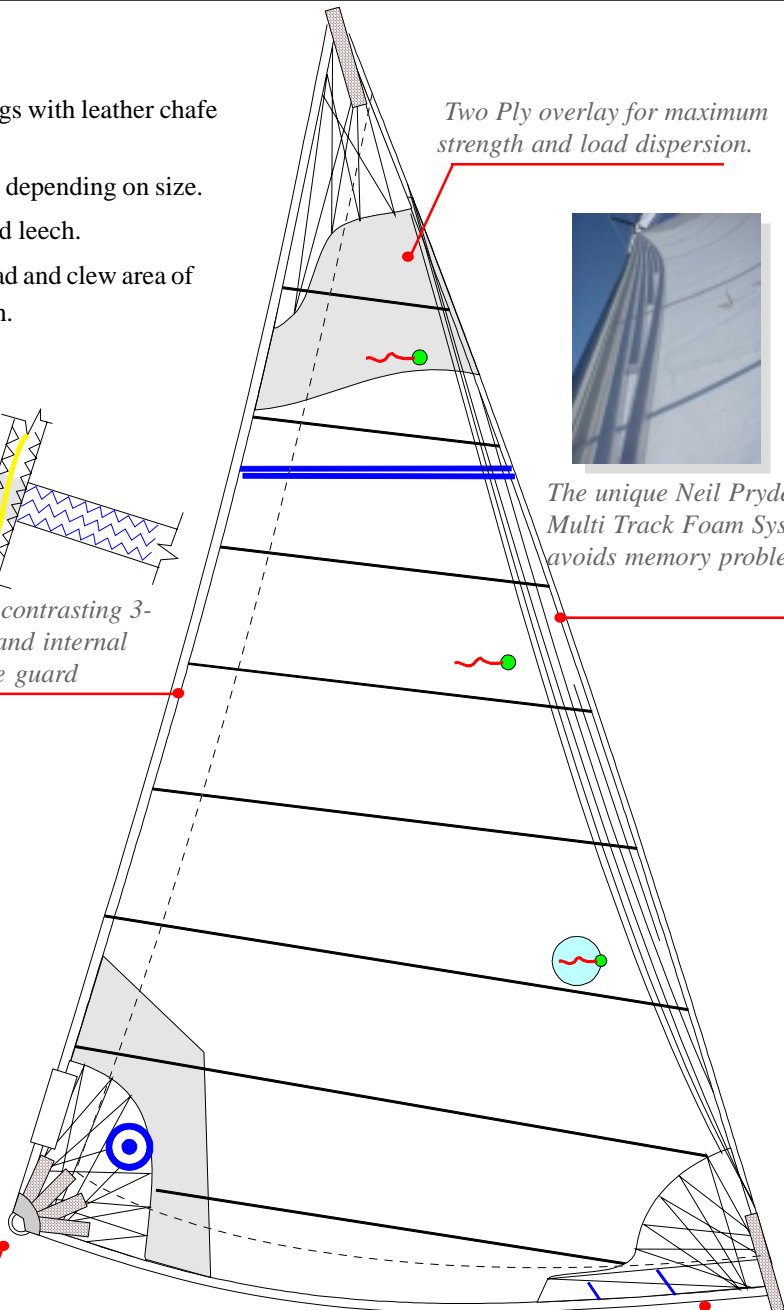

Integrated reefing patch along foot and leech (at head) and reefing marks to match pre-configured sheet lead locations.

Quality, Service, Value

- ◆ Every sail we build comes with the assurance of a two year warranty of quality, service and value.
- ◆ If you ever need service, our consultants will direct you to the nearest of our worldwide network of Service lofts.
- ◆ No matter where in the world your sailing takes you, we are there to help.
- ◆ For further information, contact your Neil Pryde consultant by dialing 1-203-874-6984 or <http://www.neilprydesails.com>