


PRODUCT SPECIFICATION GUIDE RACE HEADSAILS

Standard Features

- Corner rings are webbed stainless steel external rings.
- Woven racing sails are cross-cut using Contender, Dimension/Polyant and Bainbridge fabrics.
- ◆ All seams will have 1 to 3 rows of 3-step stitching, depending on size.
- Patches are "fan" type radial.
- Sails include 2-3 draft stripes and numbers.
- Spreader and Stanchion patches.
- Kevlar or Spectra leech & foot lines.
- Tell-tails and one tell tail window.
- Zipper sausage sailbag.

Optional Features

- Light weight sacrifical U.V. Cover
- Up and Over Leechline

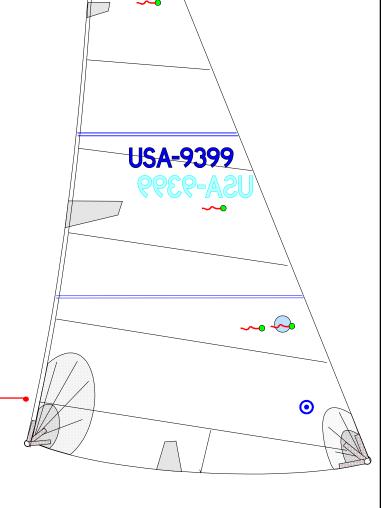

Quality, Service, Value

High performance racing sails come with a two year warranty on materials and workmanship.

Radial patches throughout.

- If you ever need service, our consultants will direct you to the nearest of our worldwide network of Service lofts.
- No matter where in the world your sailing takes you, we are there to help.
- For further information, contact your Neil Pryde consultant by dialing 1-203-874-6984 or http://www.neilprydesails.com

Drawings and type may describe features not applicable to all sizes of sails. Our ongoing development program may change features and specifications without notice. 17-Oct01