

Standard Features

- ◆ Heavy gauge aluminum headboards with stainless steel liners and hand-sewn metal slide(s) depending on application.
- ◆ Woven racing sails are cross-cut using Contender, Dimension/Polyant and Bainbridge fabrics
- ◆ Boats over 30ft (9.1mt) l.o.a. are fitted with a two ply head and clew
- ◆ Luff and foot attachments (if needed) attached with hand-sewn webbing.
- ◆ Reef rings are stainless steel pressed rings with webbing load straps, tack reefs equipped with dual "dogbone" stainless steel rings.
- ◆ Corner rings are webbed Stainless Steel external rings.
- ◆ Batten pockets finished with our Internal Velcro system.
- ◆ Shelf or loose foot, Flattener and Cunningham
- ◆ All seams will have 1 to 3 rows of 3-step stitching, depending on application.
- ◆ Sails include; 2-3 sets of draft stripes, numbers, and insignia
- ◆ Patches are "fan" type radial.
- ◆ Kevlar or Spectra "up and over" leechline on boats over 30ft
- ◆ Tell-tales at each batten pocket.
- ◆ Dimensions maximized at all girth stations.
- ◆ Zipper sausage sailbag.

Optional Features

- ◆ One or more reefing points.
- ◆ Full length battens.
- ◆ Seamkote.

Quality, Service, Value



- ◆ High performance racing sails come with a two year warranty on materials and workmanship.
- ◆ If you ever need service, our consultants will direct you to the nearest of our worldwide network of Service lofts.
- ◆ No matter where in the world your sailing takes you, we are there to help.
- ◆ For further information, contact your Neil Pryde consultant by dialing 1-203-874-6984 or <http://www.neilprydesails.com>

Drawings and type may describe features not applicable to all sizes of sails. Our ongoing development program may change features and specifications without notice.

Copyright Neil Pryde Sails Int. 2002 17-OCT-01



Super strong double aluminum headboards featuring hand sewn metal slides (if n

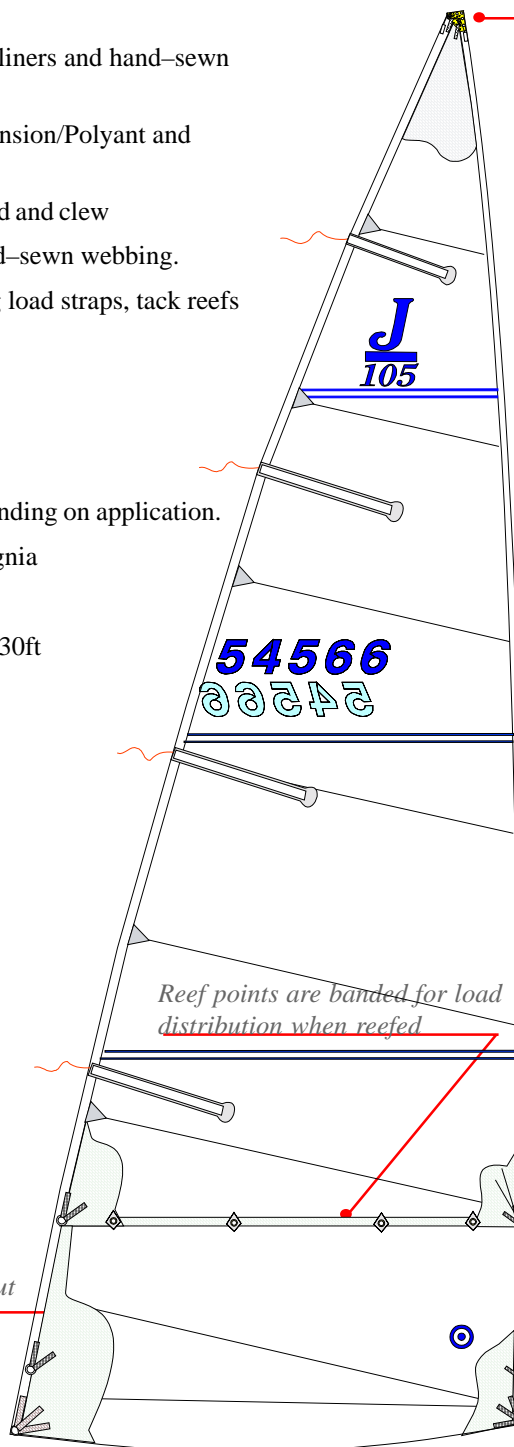

Reef Dogbones

Radial Patches throughout

Reef points are banded for load distribution when reefed